


IGNITION SYSTEM FOR GAS TURBINES

CONTINENTAL
CONTROLS
CORPORATION



High Energy Ignition System

ISO 9001 Certified

Including Exciter and Igniter TI-100 for Gas Turbines

APPLICATION

Gas turbines, whether burning liquid or gaseous fuels, all require a robust ignition source to provide reliable light-offs. The TI 100 improves upon many of these OEM systems by providing a high energy spark that will overcome ignition problems such as condensation on the igniter. The TI 100 can provide these high energy sparks at a rapid rate of up to 21 sparks per second.

COMPONENTS

The ignition system consists of four components: the Exciter, the Igniter, the Input Lead to connect the Exciter and Igniter, and a Housing for the Igniter that is specific to the model of gas turbine.


EXTENDED LIFE

The Igniter itself is expected to last at least 600 starts. The Exciter is expected to last more than 3000 starts.

HIGH ENERGY OUTPUT

Many turbine ignition systems use spark gaps. In effect, there is a release of stored energy across a gap when a capacitor stores a sufficient charge. As the gap in the igniter wears, the igniter requires more voltage to fire and the output voltage from the igniter decreases. The TI 100's advanced design eliminates this phenomenon of decreased power with age. In fact, the TI 100 spark will only increase in intensity as the igniter tip wears.

*High Energy
Ignition
System with
Exciter and
Igniter*

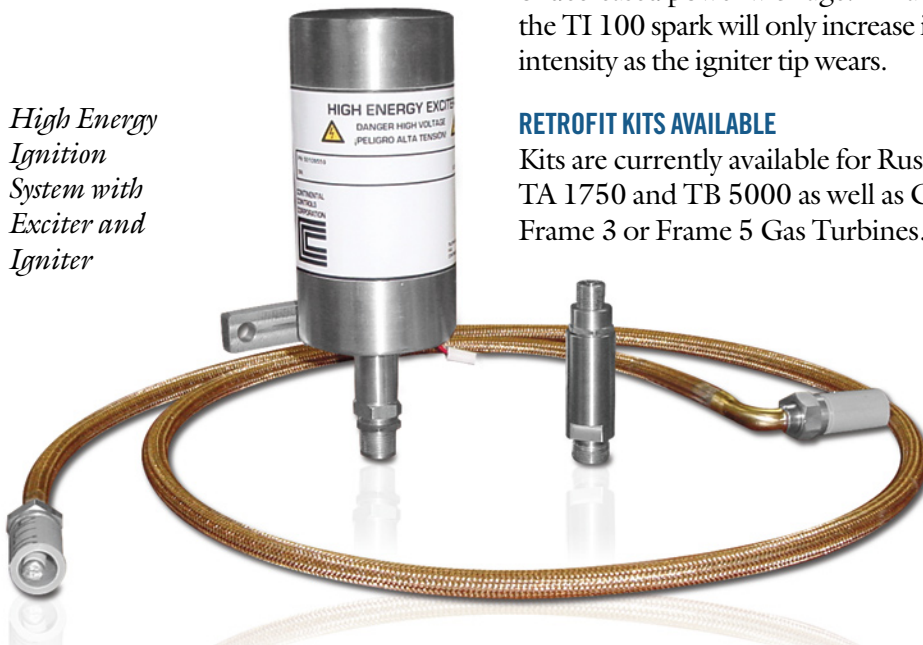

RETROFIT KITS AVAILABLE

Kits are currently available for Ruston TA 1750 and TB 5000 as well as GE Frame 3 or Frame 5 Gas Turbines.

**IMPROVED
SPARK INTENSITY**

RELIABLE LIGHT-OFFS

**NO MORE FAILED
STARTS DUE TO
POOR IGNITION**

**WORKS WITH
BOTH LIQUID AND
GASEOUS FUELS**

**OVERCOMES PROBLEMS
DUE TO CONDENSATION**

**12 VDC OR 120 VAC
POWER OK**

LONGER LIFE IGNITER

SPECIFICATIONS

INPUT POWER

85 to 265 VAC or
18-32 VDC

NET WEIGHT

10 lbs.

OPERATING TEMPERATURE

-25° to +75° C

DUTY CYCLE

5 Minutes On, 10 Minutes Off

OUTPUT HARNESS

XXXXXXXXXXXXXX

VOLTAGE

3000 VDC Maximum

CONSTRUCTION

Nickel Braid (Waterproof)

IGNITER TIP

XXXXXXXXXXXXXX

MAXIMUM TEMPERATURE

1000° C

OPTIONS

Hazardous Area EExd,
Group IIC


Safe Area Only

*High Energy
Exciter*



Igniter

CONTINENTAL
CONTROLS
CORPORATION



8845 Rehco Rd., San Diego, CA 92121 USA

Tel: 858-453-9880 • Fax: 858-453-5078

www.continentalcontrols.com